

Notes:


Total rise from floor to ground level 1990mm
12equal risers @ 165.8mm and 250mm min.
clear going

All design,support, sizes calculations to be confirmed by structural engineers

This drawing has been prepared to show setting out requirements only and it is to be read in conjunction of Structural Engineer's drawings.

NOTE:

Staircase, handrails & vertical bars to be colour RAL 7011. Bar and rail metal, formed from 10mm vertical bars with 25x25mm horizontal rails, fixed to structure.

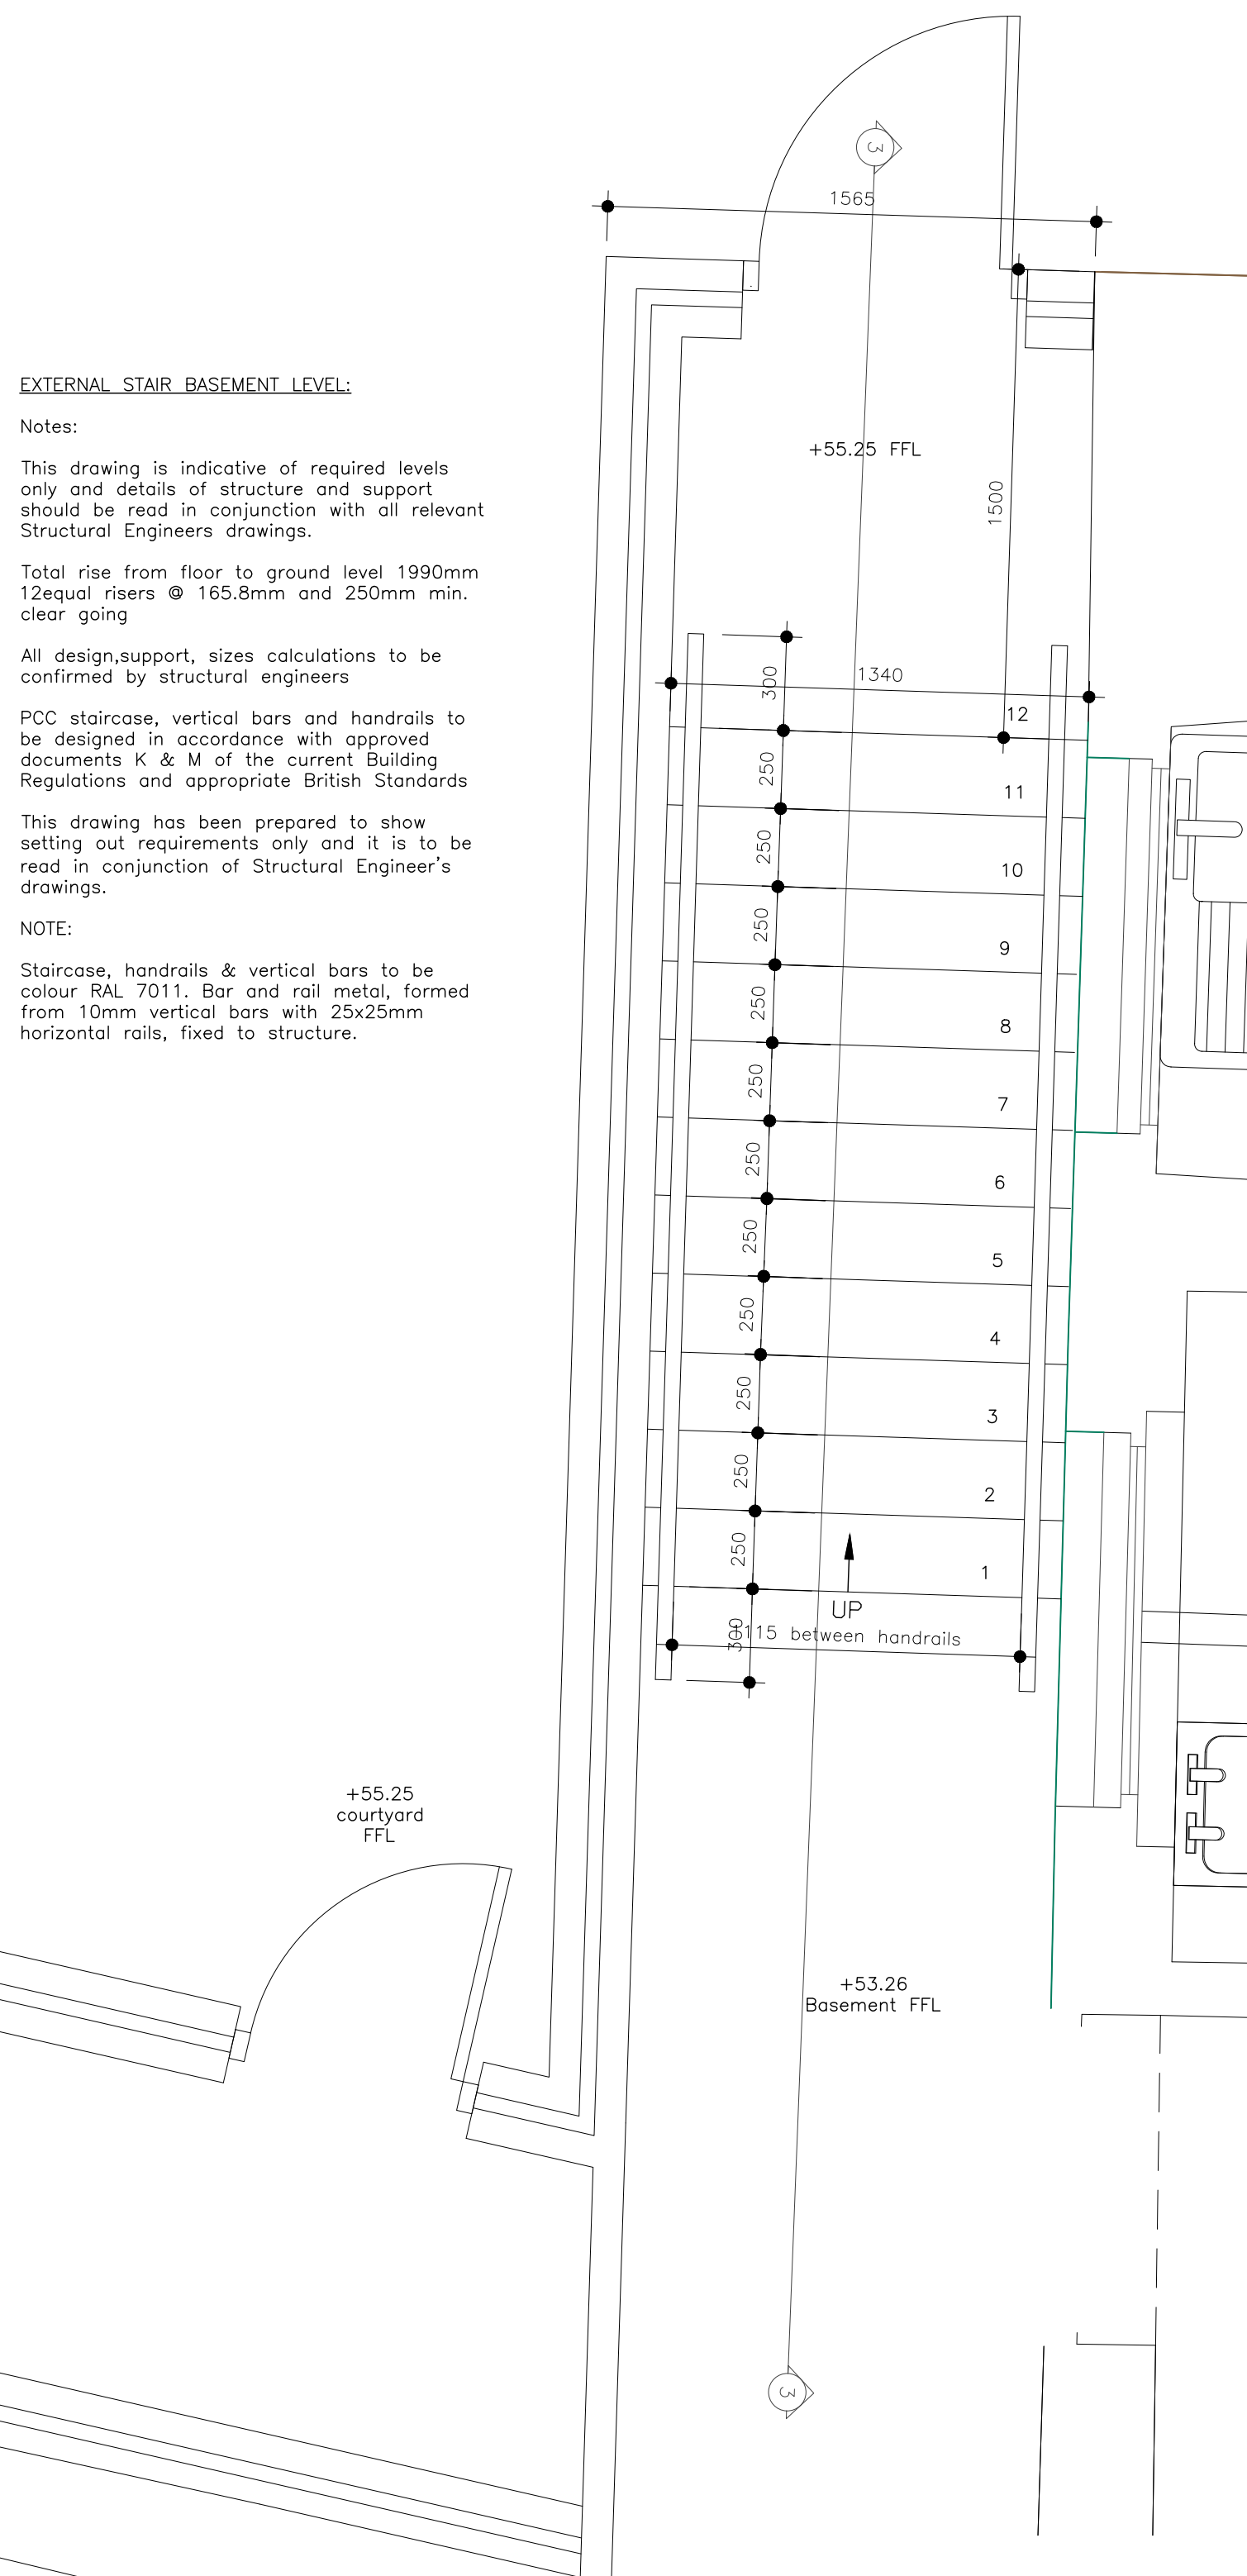

Notes:

Total rise from floor to ground level 4670mm
31 equal risers @ 150mm and 250mm min.
clear going

All design, support, sizes calculations to be confirmed by structural engineers

PCC staircase, square vertical bars and handrails to be designed in accordance with approved documents K & M of the current Building Regulations and appropriate British Standards


This drawing has been prepared to show setting out requirements only and it is to be read in conjunction of Structural Engineer's drawings.

NOTE:

Staircase, handrails & vertical bars to be colour RAL 7011. Bar and rail metal, formed from 10mm vertical bars with 25x25mm horizontal rails, fixed to structure.

NOTE:

To read in conjunction with drawing
no. 8510s-138A
Temporary access to be provided until
courtyard works are completed.

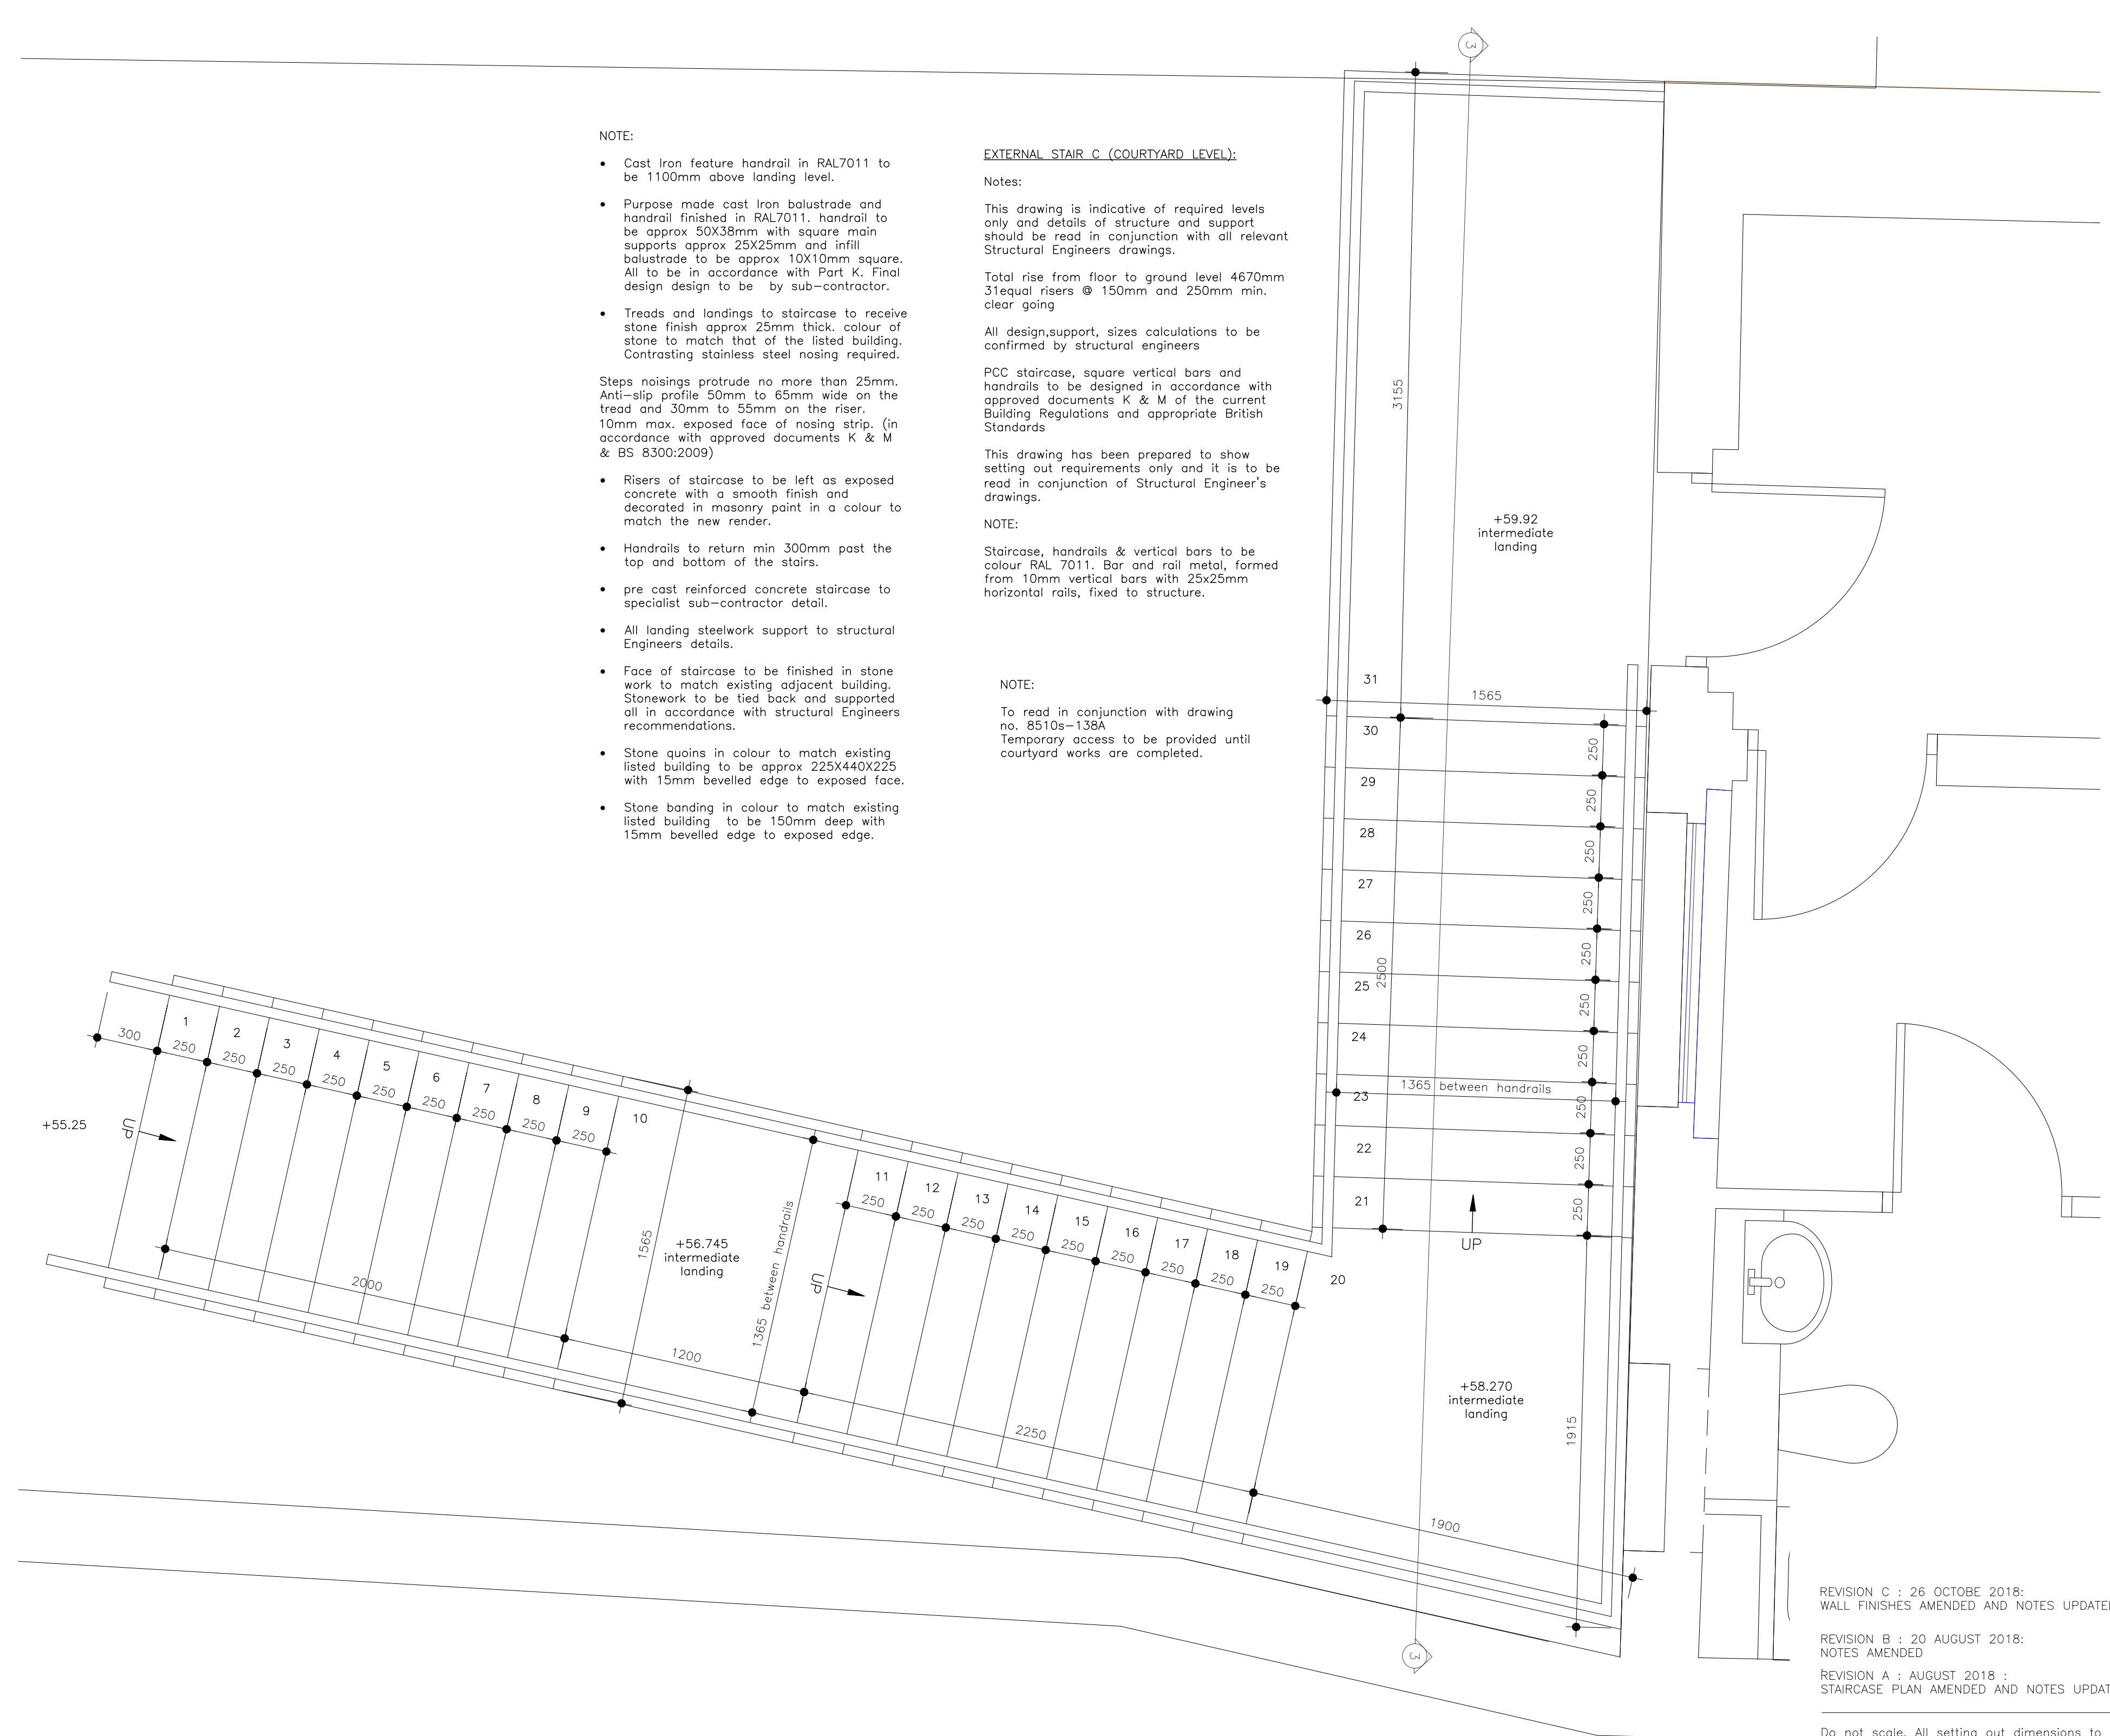

Proposed stair layout design based on levels shown on MET Survey information see drawings:
P18-00004-MET-EXT-XX-TOP-M2-G-001
P18-00004-MET-INT-2FP-M2-B-1
P18-00004-MET-INT-3FP-M2-B-1
P18-00004-MET-INT-4FP-M2-B-1

REVISION C : 26 OCTOBE 2018:
WALL FINISHES AMENDED AND NOTES UPDATED.

FC

REVISION B : 20 AUGUST 2018:
NOTES AMENDED

RW

REVISION A : AUGUST 2018 :
STAIRCASE PLAN AMENDED AND NOTES UPDATED

N

Do not scale. All setting out dimensions to be site confirmed prior to works commencing and any discrepancies confirmed to architect. This drawing is to be read in conjunction with all other architectural and structural engineers drawings.



Dixon Dawson Chartered Architects
Moor Oaks Lodge

Moor Oaks Lodge
Moor Oaks Road
Barnstable

Broomhill
Sheffield

S10 1BX

T 0114 2683888
F 0114 2683007

F 0114 2683007
sheffield@dixondawson.co.uk

MERRYWALKS RETAIL CENTRE
KING STREET, STROUD, GL5 1RR
for STROUD REGENERATION LIMITED

PROPOSED EXTERNAL STAIR C

PROPOSED STAIR PLANS

1:20@A1

Date:
26/06/18

Drawn:
PN

Checked:

8510s/137C

tender issues